



Technický list produktu (datasheet): DW125540--

Nást.rozvaděč rozebíratelný, 12U, š. 550mm, hl. 400mm, 19", 7035



SCHRACK-Info

TECHNICAL DATA

- Steel sheet
- Heights: 4, 6, 9, and 12U
- Width: 550mm
- Depth: 400mm
- Colour: hellgrey RAL 7035
- Degree of protection: IP20
- Front-full-glassdoor made from safety glass 5mm including lock and 2 keys
 - Door hinged right, easy and quick change to left hinging possible
 - Door opening: 130°
- 19"- rails (2 pcs.) galvanized. Step-adjustable in the front cabinet part.
- Cable-entry-openings in roof (1x), floor (1x) and rearpanel (1x). Covered with „break-out style“ blanking covers, which can be easily broken out by use of a simple tool like a screwdriver.
- Passive cooling by sharing heat with environment via chassis
- space between front vertical 19"-rail and door glass at max. spacing: W550 – 35mm
- Earthing:
 - M8-Earthing point in the rear of the cabinet
 - Earthing cables for connection to all dismountable parts included in delivery.
- Wide range available accessories (fans, cable entry panels, fixed shelves, patch panels, cable management, PDUs, doors, etc.)
- Units of measurement: Inch: 1" = 25,4mm, Unit (Height Unit): 1U = 1,75" = 44,45mm


Technické informace

Šířka (netto) (mm)	550,00
Výška (netto) (mm)	580,00
Hloubka (netto) (mm)	400,00
Hmotnost (netto) (kg)	18,40
Minimální teplota okolí (°C)	0
Maximální teplota okolí (°C)	40
Vhodné pro U	12U-580 mm
Produkt	Rozvaděč nástěnný rozebíratelný IP20
Barva	RAL 7035 (světle šedá)
Možnost instalace střešní ventilační jednotky	Ne
Základní popis	Rozváděč

Datová tabulka: Nást.rozvaděč rozebíratelný, 12U, š. 550mm, hl. 400mm, 19", 7035

Typ	A	B	C	D	E	R1	R2	Gewicht brutto (kg)	Gewicht netto (kg)	Empfohlene Maximallast (kg)
	(mm)									
DW045540--	230	180	505	550	400	180	435	11,4	11,2	35
DW065540--	320	270	505	550	400	270	435	13,6	13,3	
DW095540--	463	412	505	550	400	412	435	17,4	17,1	
DW125540--	590	530	505	550	400	530	435	19,7	19,4	

Rozměrový výkres: Nást.rozvaděč rozebíratelný, 12U, š. 550mm, hl. 400mm, 19", 7035

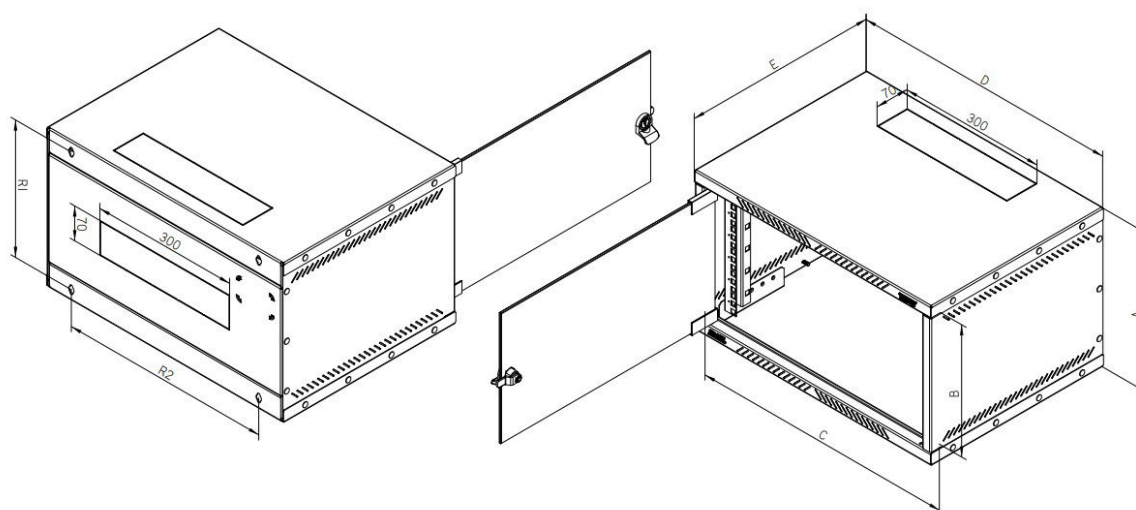

Tabulka objednacích čísel

POPIS	OBJ. ČÍSLO
Volitelné příslušenství	
Napájecí panel PDU 19", 7x SCHUKO, přep.ochrana, 1.25U, 2 m 2m-connector cable, RAL7035	IU070113
19" napájecí panel PDU, 9x Schuko, vypínač, 1U, 2 m, černý Hliníkový profil	Q7070114-A
19" napájecí panel PDU, 7x Schuko, přepěťová ochrana, 1U Přívodní kabel 2 m, černý, hliníková profil	Q7070113-A