



Technický list produktu (datasheet): DW21605D--

# Nást.rozvaděč dvoudílný, 21 U, š. 600mm, hloubka 515mm, RAL 7035



**SCHRACK-Info**

## TECHNICAL DATA

- Steel sheet
- Available heights: 4, 6, 9, 12, 15, 18 and 21 U
- Width: 600mm, Depth: 515/615mm
- Colour: lightgrey RAL 7035
- Degree of protection: IP20
- Front-full-glassdoor made from safety glass 5mm including lock and 2 keys  
Door hinged right, easy and quick change to left hinging possible  
Door opening: ca 180°  
Fullmetall- and perforated doors available as an option
- Removable sidepanels with lock and keys
- 19" rails (2 pcs.) galvanised, continuously depthadjustable. Numbering of Height-Units (U) by laser for easy readability.
- Cable-entry-openings in roof (1x), floor (1x) and rearpanel (2x). Covered with „break-out-style“ blanking covers, which can be easily broken out by use of a simple tool like a screwdriver.
- Cable-entry-panel with brush included (1x).
- Passive cooling by ventilation slots
- M8- Earthing point in the rear of the cabinet.
- FastOn-Earthing-connections to all dismountable parts pre-installed.
- Including assembly materials:  
8 x Cage nuts, bolts and washers M6.  
4x dowel 10x50 and 4x screws M6x50 for fixing the wall.
- Wide range of available accessories (patchpanels, fixed shelves, PDUs, cable management, doors, etc.).
- Enclosure is delivered fully-assembled.
- space between front vertical 19"-rail and door glass at max. spacing: W600 – 25mm
- Units of measurement:  
Unit (Height Unit): 1U= 44,45mm, Inch: 1"= 25,4mm, Unit (Height Unit): 1U= 1,75"

## Technické informace

|                              |             |
|------------------------------|-------------|
| Šířka (netto) (mm)           | 600,00      |
| Výška (netto) (mm)           | 1.085,00    |
| Hloubka (netto) (mm)         | 515,00      |
| Hmotnost (netto) (kg)        | 34,50       |
| Minimální teplota okolí (°C) | 0           |
| Maximální teplota okolí (°C) | 40          |
| Vhodné pro U                 | 21U-1035 mm |


## Technické informace - Pokračování

|                                               |                                  |
|-----------------------------------------------|----------------------------------|
| Produkt                                       | Rozvaděč nástěnný dvoudílný IP20 |
| Možnost instalace střešní ventilační jednotky | Ne                               |
| Základní popis                                | Rozváděč                         |


### Datová tabulka: Nást.rozvaděč dvoudílný, 21 U, š. 600mm, hloubka 515mm, RAL 7035

| Typ        | A    | B   | C   | D   | E   | R1  | R2  | Gewicht brutto (kg) | Gewicht netto (kg) | Empfohlene Maximallast (kg) |
|------------|------|-----|-----|-----|-----|-----|-----|---------------------|--------------------|-----------------------------|
|            | (mm) |     |     |     |     |     |     |                     |                    |                             |
| DW06605D-- | 370  | 265 | 516 | 600 | 515 | 324 | 420 | 17,3                | 16,9               | 20                          |
| DW09605D-- | 500  | 395 | 516 | 600 | 515 | 454 | 420 | 20,5                | 20,1               | 25                          |
| DW12605D-- | 635  | 530 | 516 | 600 | 515 | 589 | 420 | 23,9                | 23,5               | 25                          |
| DW15605D-- | 770  | 665 | 516 | 600 | 515 | 724 | 420 | 27,4                | 27                 | 30                          |
| DW18605D-- | 900  | 795 | 516 | 600 | 515 | 854 | 420 | 30,5                | 30,1               | 30                          |
| DW21605D-- | 1035 | 930 | 516 | 600 | 515 | 989 | 420 | 35,58               | 35,11              | 35                          |

**Rozměrový výkres: Nást.rozvaděč dvoudílný, 21U, š. 600mm, hloubka 515mm, RAL 7035**

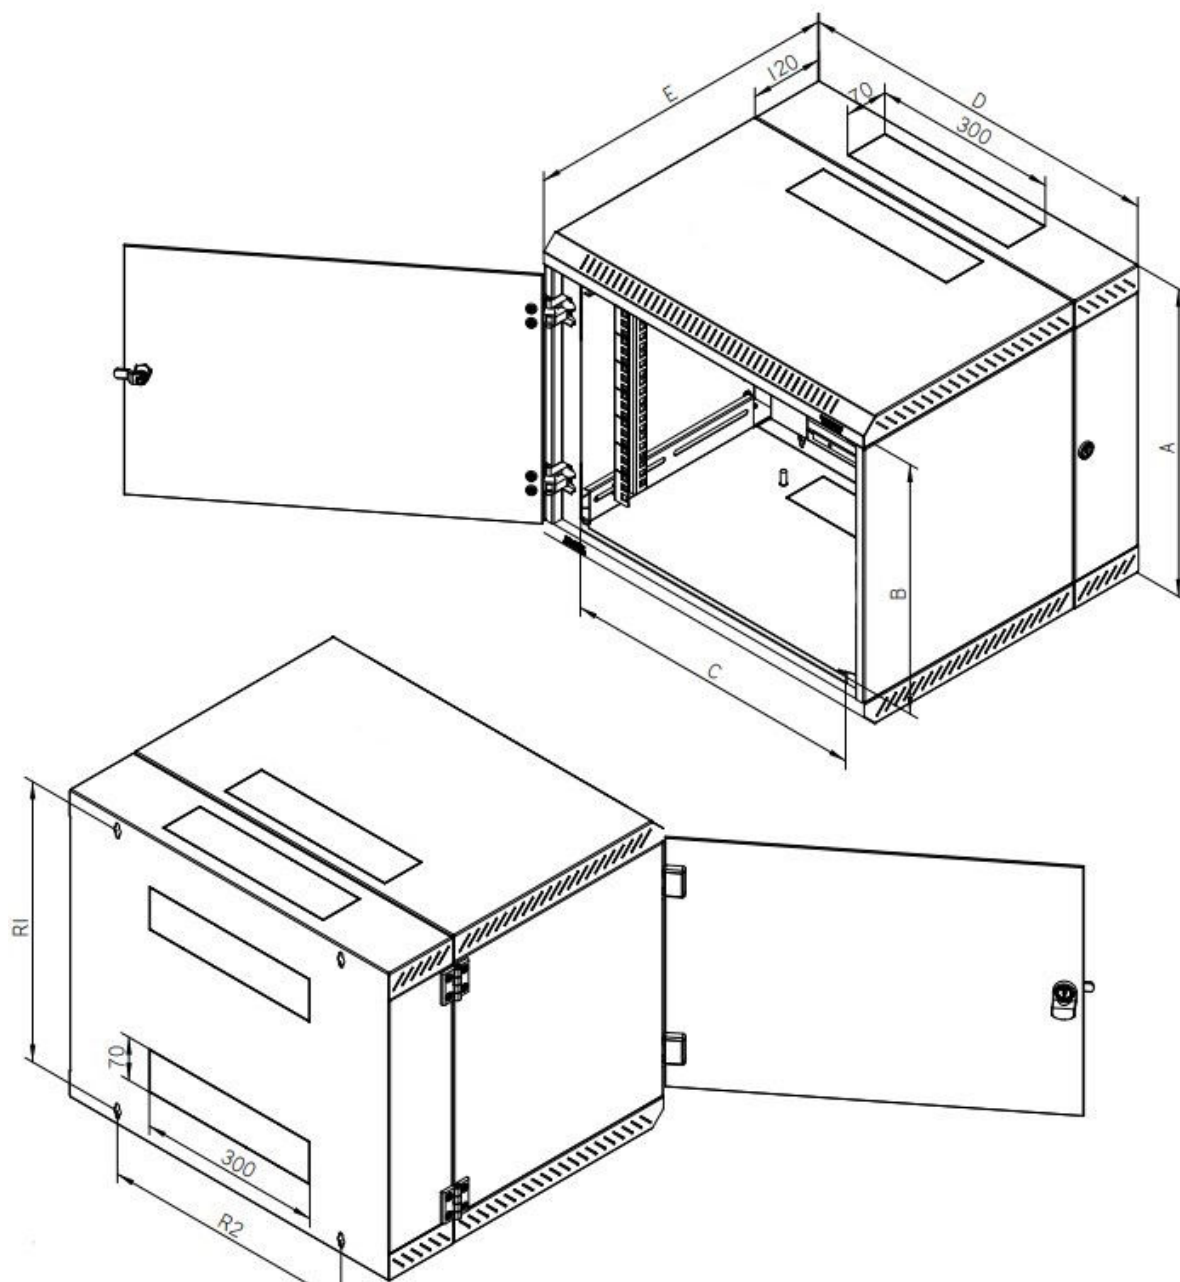

## Schnittansicht der vertikalen 19"-Profilschienen

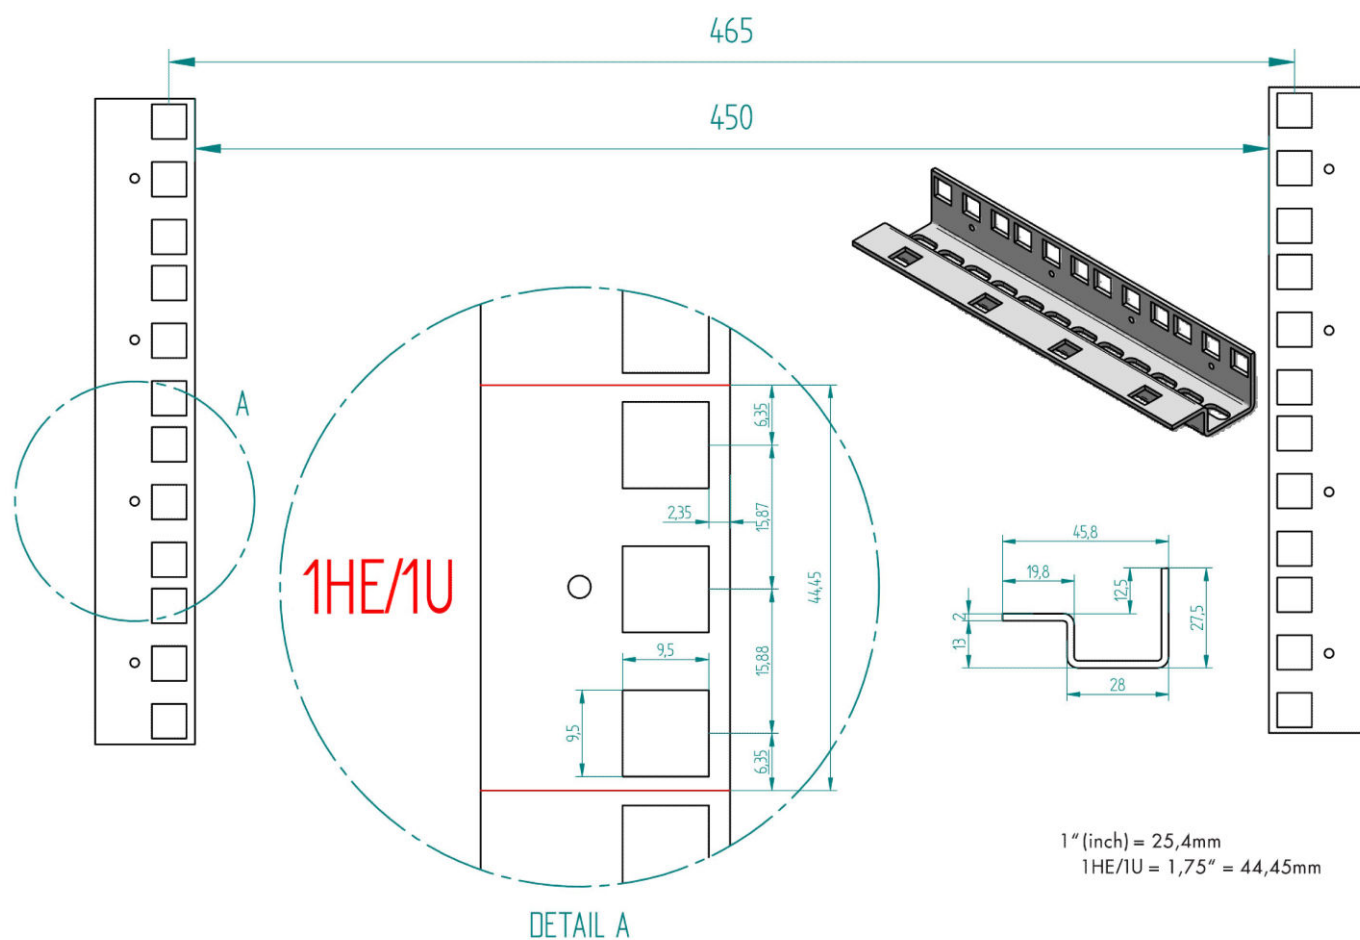

## Tabulka objednacích čísel

| POPIS                                                                                                      | OBJ. ČÍSLO |
|------------------------------------------------------------------------------------------------------------|------------|
| Nást.rozvaděč dvoudílný, 21U, š. 600mm, hloubka 515mm, RAL 7035                                            | DW21605D   |
| <b>Volitelné příslušenství</b>                                                                             |            |
| 19" polička s perf., hl. 350mm, šroub., zátěž 50kg, 1U, RAL 7035                                           | DFS14835-C |
| Montážní sada M6 (šroub, matice, podložka - sada 50 ks)                                                    | DSSRA050   |
| 19" osvětlovací jednotka LED, magnetická                                                                   | DV900336-A |
| Napájecí panel PDU 19", 9x SCHUKO, 1U, kabel 2 m                                                           | IU070114   |
| Napájecí panel PDU 19", 8x SCHUKO, vypínač, 1U, kabel 2 m<br>2m-connector cable, RAL7035                   | IU070124   |
| Dveře skleněné pro DW 600mm, výsuvná klika Schrack, 21U<br>Vorbereitung                                    | DWRT2167   |
| Držák poličky v zadní části rozvaděče DWxx6040/605D, pl.bočn.                                              | DFSZDW01   |
| Switch L2 neřízený 24xRJ45 10/100/1000, 19", interní PSU, tichý<br>19" provedení, kovové šasi, interní PSU | QLGSW2457  |