Technický list produktu (datasheet): HDCR100105

Serverový rozvaděč IS-1 bez bočnic, 43U 800x1000, šedá

bez bočnic, RAL7035 šedá

SCHRACK-Info

Versatile application from small data rooms to large-scale data centres. Flexibly extendable for applications in cold or warm aisle enclosures. Equipped with passively vented doors (single or double wing), top cover for cable entry from above. The basic frame and all cladding parts have a high-quality, robust powder coating.

Frame clearance at front: 112mm
Static load capacity: up to 18,000N
Material
Basic frame: 1.50mm steel sheet
Doors: 1.50mm steel sheet
Side panels: 0.75mm steel sheet
482.6mm (19") mounting angles: 2.00mm steel sheet
Finish
Frame and cladding parts: powder-coated
Internal fittings: galvanized
Equipment

- 1 basic frame, demountable, with integrated 25-mm mounting hole pitch pattern on all sides
- 4 galvanised 482.6mm (19") mounting angles with square perforations at the front and sides for cage nuts in acc. with IEC 297 d EIA, incl. height unit pitch pattern and U-labelling (asymmetrical on the right for B 700 racks)
- 1 front door, passive venting (hexagonal perforations SW 6-6.7, free clearance 81%), with swing handle and profile half cylinder (30/10), EK333 lock and 4- point locking system
- 1 rear door, passive venting (hexagonal perforations SW 6-6.7, free clearance 81%), with swing handle and profile half cylinder (30/10), EK333 lock and 4- point locking system

Online objednal 2024-10-30, Vyobrazení nejsou závazná. Změny údajů vyhrazeny.

www.schrack.cz

Get Ready. **Get Schrack.**

- 2 side panels, screw-fastened, optional sash-fastener (only for cabinets with side panels, see table)
- 1 two-part top cover with knockouts at sides (not for width 600) and rear for cable entry and for up to 6 fans, rear cable entry knockout closed by brush strip
- Open base frame
- 4 levelling feet, incl. protective caps n 1 earthing set, mounted (all flat components earthed, central earthing point)

Inspections/Norms

Earthing in acc. with DIN VDE 0100-540
Components in acc. with IEC 297-1/2 (19")

Technické informace

Šířka (netto) (mm)	800,00
Výška (netto) (mm)	2.000,00
Hloubka (netto) (mm)	1.000,00
Barva	RAL 7035 (světle šedá)
U	43
Hmotnost (netto) (kg)	115,00
Minimální teplota okolí (°C)	-10
Maximální teplota okolí (°C)	60
Stupeň ochrany krytí	IP20
Instalační hloubka (mm)	747

Rozměrový výkres: Serverový rozvaděč IS-1 bez bočnic, 43U 800x1000, šedá

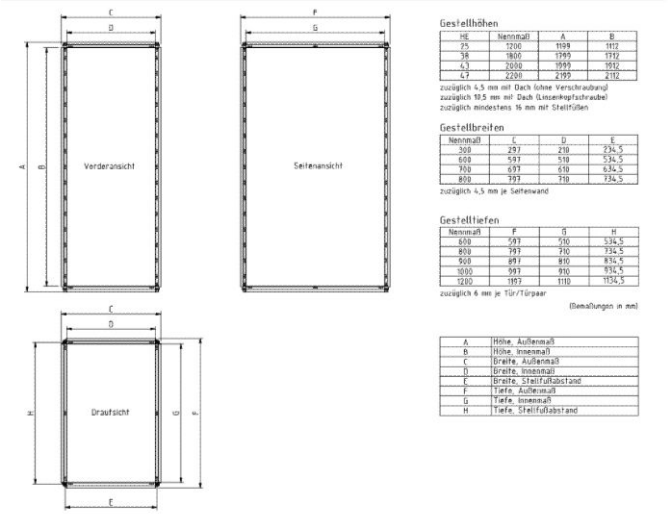

Online objednal 2024-10-30, Vyobrazení nejsou závazná. Změny údajů vyhrazeny.

www.schrack.cz

Get Ready. **Get Schrack.**

Rozměrový výkres: Serverový rozvaděč IS-1 bez bočnic, 43U 800x1000, šedá

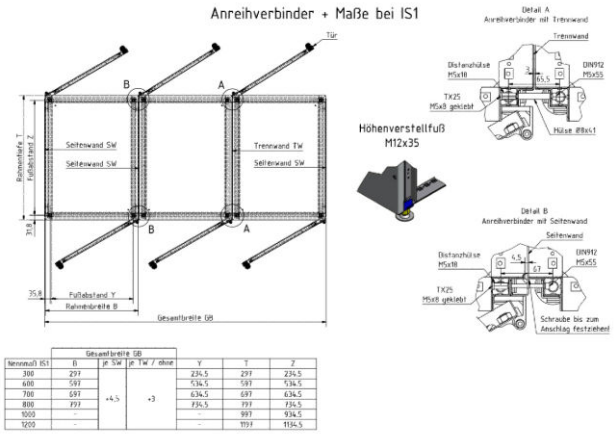

Nennmaß IS1	B	je SW	je TW / ohne	Y	T	Z
300	297	+4,5	+3	234,5	297	234,5
600	597			534,5	597	534,5
700	697			634,5	697	634,5
800	797			734,5	797	734,5
1000	-			-	997	934,5
1200	-			-	1197	1134,5

POPIS	OBJ. ČÍSLO
Serverový rozvaděč IS-1 bez bočnic, 43U 800x1000, šedá bez bočnic, RAL7035 šedá	HDCR100105

Online objednal 2024-10-30, Vyobrazení nejsou závazná. Změny údajů vyhrazeny.

www.schrack.cz

Get Ready. **Get Schrack.**