

Technický list produktu (datasheet): HDCR100145

Rozvaděč IS-1 IP54 včetně bočnic, 25U 600x1000, šedá

včetně bočnic, IP54, RAL7035 šedá



SCHRACK-Info

With IP54 rating, specially designed for industrial applications and demanding environments. Provides protection from foreign bodies, splash water and spraying water from all directions. Perfectly suited to climate control and office solutions (sound insulation optional).

Frame clearance at front: 112mm

Static load capacity: up to 18,000N

Material:

Basic frame: 1.50mm steel sheet

Doors: 1.50mm steel sheet

Side panels: 1.50mm steel sheet

482.6mm (19") mounting angles: 2.00mm steel sheet

Glass: 3.00mm single pane safety glass

Finish:

Frame and cladding parts: powder-coated

Internal fittings: galvanised

Equipment

- basic frame, demountable, with integrated 25-mm mounting hole pitch pattern on all sides
- 4 galvanised 482.6mm (19") mounting angles with square perforations at the front and sides for cage nuts in acc. with IEC 297 d EIA, incl. height unit pitch pattern and labelling
- 1 front door, single wing with 3mm single pane safety glass, swing handle and profile half cylinder (30/10), EK333 lock and 4-point locking system

- 1 rear door, single wing steel sheet, solid, with swing handle and profile half cylinder (30/10), EK333 lock and 4- point locking system
- 2 side panels, screw fastened, two-section from depths of 1,000mm
- 1 top cover, single part, solid
- 1 Bottom cover panel
- 1 plinth, H 100mm, solid n 4 levelling feet, incl. protective caps
- 1 earthing set, mounted (all flat components earthed, central earthing point)


Inspections/Norms

Earthing in acc. with DIN VDE 0100-540
Components in acc. with IEC 297-1/2 (19")

Technické informace

Šířka (netto) (mm)	600,00
Výška (netto) (mm)	1.300,00
Hloubka (netto) (mm)	1.000,00
Barva	RAL 7035 (světle šedá)
U	25
Hmotnost (netto) (kg)	120,00
Minimální teplota okolí (°C)	-10
Maximální teplota okolí (°C)	60

Rozměrový výkres: Rozvaděč IS-1 IP54 včetně bočnic, 25U 600x1000, šedá

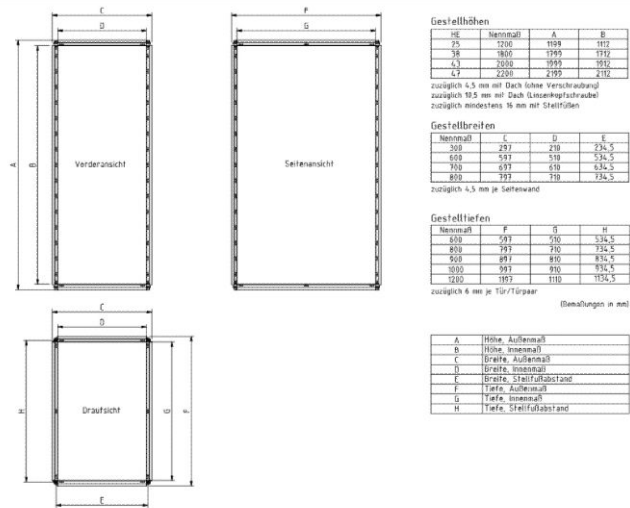

Rozměrový výkres: Rozvaděč IS-1 IP54 včetně bočnic, 25U 600x1000, šedá



POPIS

OBJ. ČÍSLO

Rozvaděč IS-1 IP54 včetně bočnic, 25U 600x1000, šedá
včetně bočnic, IP54, RAL7035 šedá

HDCR100145