

Technický list produktu (datasheet): HDCR100163

Kolokační rozvaděč IS-1, 2 sekce, 2x 23U 600x1200, šedá

světle šedá, 2 sekce



SCHRACK-Info

Compartments: 2

U/Compartment: 23

Material:

Basic frame: 1.50mm steel sheet

Doors: 1.50mm steel sheet

Side panels: 1.50mm steel sheet

482.6 mm (19") mounting angles: 2.00mm steel sheet

Finish:

Frame and cladding parts: powder-coated

Internal fittings: galvanised

Static load capability: 25kg per U

Frame clearance, front: 112mm

Installation depth: 747mm

Equipment:

- 1 basic frame, demountable, with integrated 25-mm mounting hole pitch pattern on all sides
- 4 galvanised 482.6mm (19") mounting angles per compartment for cage nuts acc. to IEC 297 d EIA, including height unit labelling
- Lateral airflow routing panel at front of each compartment
- Per compartment, 1 single wing front door, passive venting (free clearance 81%), with swing handle, prepared for DIN profile half cylinder (30/10), 2- point locking system

- Per compartment, 1 single wing rear door, passive venting (free clearance 81%), with swing handle, prepared for DIN profile half cylinder (30/10), 2- point locking system
- 2 double-wing side panels, screw fastened n 1 top cover, single part, solid (only width 600) or with cable entry aperture (on width 800)
- Depending on the version, 2 or 3 solid partition plates
- 1 bottom cover, solid with cable entry apertures, depending on the model
- 1 or 2 cable ducts for B600 / 2 or 4 cable ducts for B800
- 4 levelling feet, incl. protective caps (provided)
- 1 earthing set, mounted (all flat components earthed, central earthing point)


Inspections/Norms

- Earthing in acc. with DIN VDE 0100-540
- Components in acc. with IEC 297-1/2 (19")


Technické informace

Šířka (netto) (mm)	600,00
Výška (netto) (mm)	2.200,00
Hloubka (netto) (mm)	1.200,00
Barva	RAL 7035 (světle šedá)
U	46
Hmotnost (netto) (kg)	165,00
Minimální teplota okolí (°C)	-10
Maximální teplota okolí (°C)	60
Stupeň ochrany krytí	IP20

Rozměrový výkres: Kolokační rozvaděč IS-1, 2 sekce, 2x 23U 600x1200, šedá

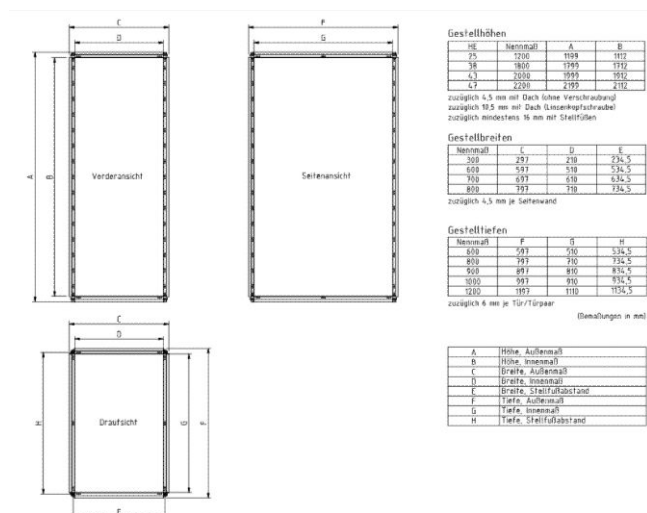

Rozměrový výkres: Kolokační rozvaděč IS-1, 2 sekce, 2x 23U 600x1200, šedá

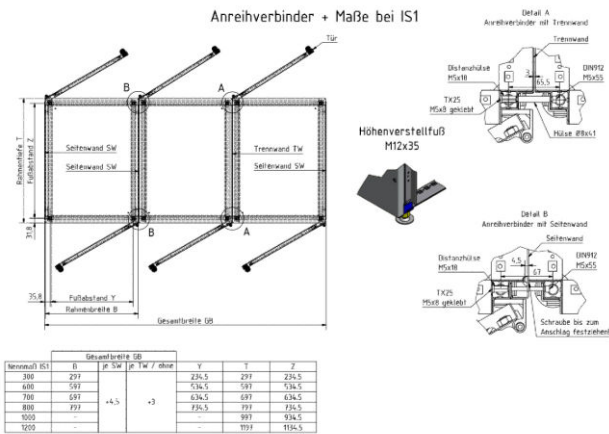

POPIS

OBJ. ČÍSLO

Kolokační rozvaděč IS-1, 2 sekce, 2x 23U 600x1200, šedá
světle šedá, 2 sekce

HDCR100163