

Technický list produktu (datasheet): HDCR100177

# Kolokační rozvaděč IS-1, 3 sekce, 3x 15U 600x1000, šedá

světle šedá, 3 sekce



## SCHRACK-Info

**Compartments:** 3

**U/Compartment:** 14

**Material:**

Basic frame: 1.50mm steel sheet

Doors: 1.50mm steel sheet

Side panels: 1.50mm steel sheet

482.6 mm (19") mounting angles: 2.00mm steel sheet

**Finish:**

Frame and cladding parts: powder-coated

Internal fittings: galvanised

**Static load capability:** 25kg per U

**Frame clearance, front:** 112mm

**Installation depth:** 747mm

**Equipment:**

- 1 basic frame, demountable, with integrated 25-mm mounting hole pitch pattern on all sides
- 4 galvanised 482.6mm (19") mounting angles per compartment for cage nuts acc. to IEC 297 d EIA, including height unit labelling
- Lateral airflow routing panel at front of each compartment
- Per compartment, 1 single wing front door, passive venting (free clearance 81%), with swing handle, prepared for DIN profile half cylinder (30/10), 2- point locking system

- Per compartment, 1 single wing rear door, passive venting (free clearance 81%), with swing handle, prepared for DIN profile half cylinder (30/10), 2- point locking system
- 2 double-wing side panels, screw fastened n 1 top cover, single part, solid (only width 600) or with cable entry aperture (on width 800)
- Depending on the version, 2 or 3 solid partition plates
- 1 bottom cover, solid with cable entry apertures, depending on the model
- 1 or 2 cable ducts for B600 / 2 or 4 cable ducts for B800
- 4 levelling feet, incl. protective caps (provided)
- 1 earthing set, mounted (all flat components earthed, central earthing point)


#### Inspections/Norms

- Earthing in acc. with DIN VDE 0100-540
- Components in acc. with IEC 297-1/2 (19")

## Technické informace

|                              |                        |
|------------------------------|------------------------|
| Šířka (netto) (mm)           | 600,00                 |
| Výška (netto) (mm)           | 2.200,00               |
| Hloubka (netto) (mm)         | 1.000,00               |
| Barva                        | RAL 7035 (světle šedá) |
| U                            | 42                     |
| Hmotnost (netto) (kg)        | 165,00                 |
| Minimální teplota okolí (°C) | -10                    |
| Maximální teplota okolí (°C) | 60                     |
| Stupeň ochrany krytí         | IP20                   |

## Rozměrový výkres: Kolokační rozvaděč IS-1, 3 sekce, 3x 15U 600x1000, šedá

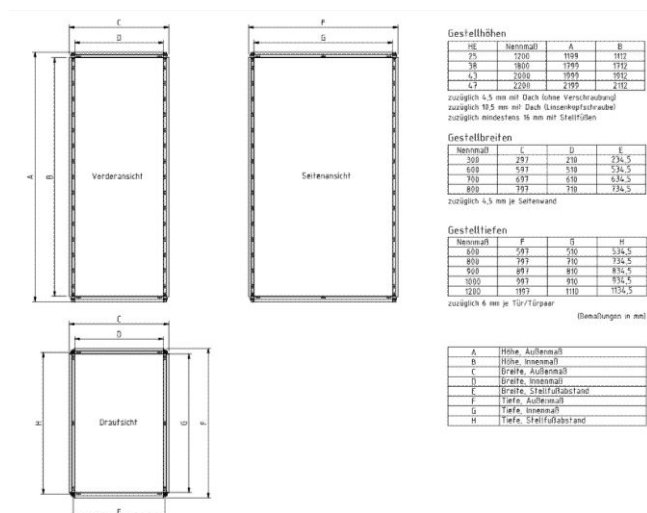

**Rozměrový výkres: Kolokační rozvaděč IS-1, 3 sekce, 3x 15U 600x1000, šedá**



POPIS

Kolokační rozvaděč IS-1, 3 sekce, 3x 15U 600x1000, šedá  
světle šedá, 3 sekce

OBJ. ČÍSLO

HDCR100177