



Technický list produktu (datasheet): HLP29LC03F

Optický propojovací kabel duplex LC-SC

9/125 OS2 3m

LSOH-3, barva žlutá

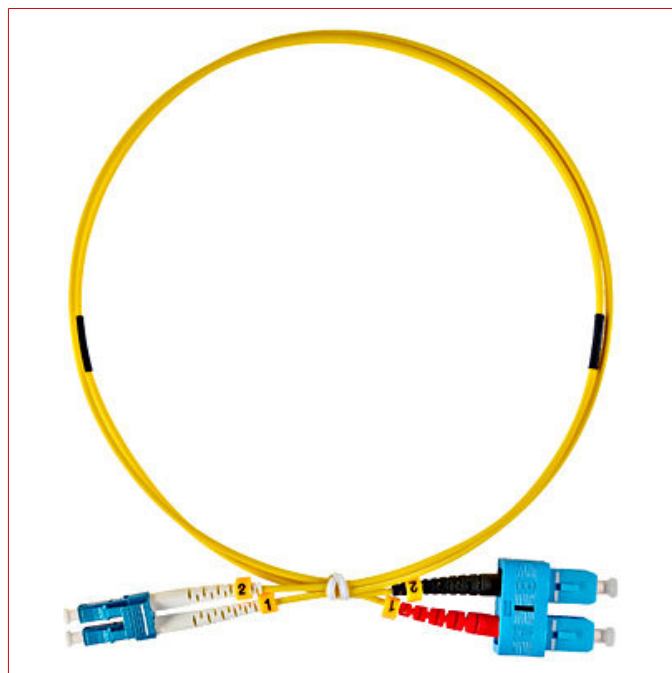

SCHRACK-Info

Single mode patch cords are used for telecom networks and also used for high speed metropolitan and access network. The single-mode patch cables are equipped with an LSOH jacket. These comply with IEC or EIA-TIA standards. These singlemode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

FEATURES

- LC/UPC - SC/UPC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Singlemode cabled fiber conforms to ITU-T G.657.A2, IEC 60793-2-50
- Duplex
- REACH, RoHS and SvHC materials compliant

APPLICATIONS

- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks


- ATM, SONET and WDM



Technické informace

Norma	IEC 61300-3-4 / IEC 61300-3-6
Norma konektoru	IEC 61754
Konektorová kombinace	LC/SC
Délka patchkabelu (m)	3,0
Vlákno	9/125 μ OS2 singlemode
Vnější plášť kabelu	LS0H
Barva	Žlutá
Vložný útlum (IL) - typický (dB)	$\leq 0,25$
Útlum odrazu (RL) - typický (dB)	≥ 50
Minimální teplota okolí (°C)	-20
Maximální teplota okolí (°C)	60
Hmotnost (netto) (kg)	0,07

Rozměrový výkres: Optický propojovací kabel duplex LC-SC 9/125 OS2 3m

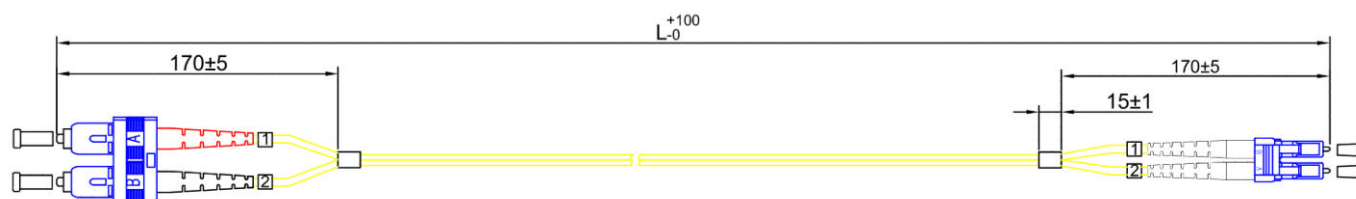

POPIS	OBJ. ČÍSLO
Optický propojovací kabel duplex LC-SC 9/125 OS2 3m LSOH-3, barva žlutá	HLP29LC03F