


Technický list produktu (datasheet): HLP2SLL00F

Optický propojovací kabel duplex LC-LC 50/125 OM5 0,5m

LSOH-3, barva limetově zelená



SCHRACK-Info

Multimode patch cords are mainly used for short-distance communication with high transmission rates, for example within a building or on a campus. The multimode patch cords are equipped with an LSOH-jacket. These comply with IEC or EIA-TIA standards. These multimode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

FEATURES

- LC/UPC - LC/UPC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Multimode cabled fiber conforms to ITU-T G.651.1, IEC 60793-2-10
- Duplex
- REACH, RoHS and SvHC materials compliant

APPLICATIONS

- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks


- ATM, SONET and WDM



Technické informace

Šířka (netto) (mm)	150,00
Výška (netto) (mm)	200,00
Hmotnost (netto) (kg)	0,04
Norma	IEC 61300-3-4 / IEC 61300-3-6
Norma konektoru	IEC 61754
Konektorová kombinace	LC/LC
Délka patchkabelu (m)	0,50
Vlákno	50/125 μ OM5 multimode
Vnější plášť kabelu	LS0H
Barva	Limetkově zelená
Vložený útlum (IL) - typický (dB)	$\leq 0,25$
Útlum odrazu (RL) - typický (dB)	≥ 30
Minimální teplota okolí (°C)	-20
Maximální teplota okolí (°C)	60

Rozměrový výkres: Optický propojovací kabel duplex LC-LC 50/125 OM5 0,5m

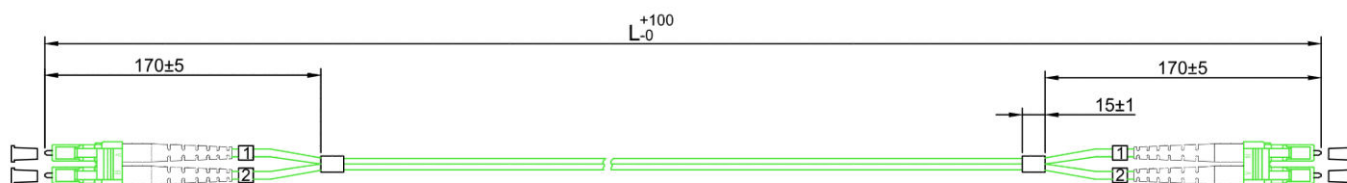

POPIS	OBJ. ČÍSLO
Optický propojovací kabel duplex LC-LC 50/125 OM5 0,5m LS0H-3, barva limetově zelená	HLP2SLL00F