


Technický list produktu (datasheet): IL144524-A

Metering insert 5-24E compl. 5 cou. pl. front pl. st. Wien

Frontblende Stahlblech, komplett

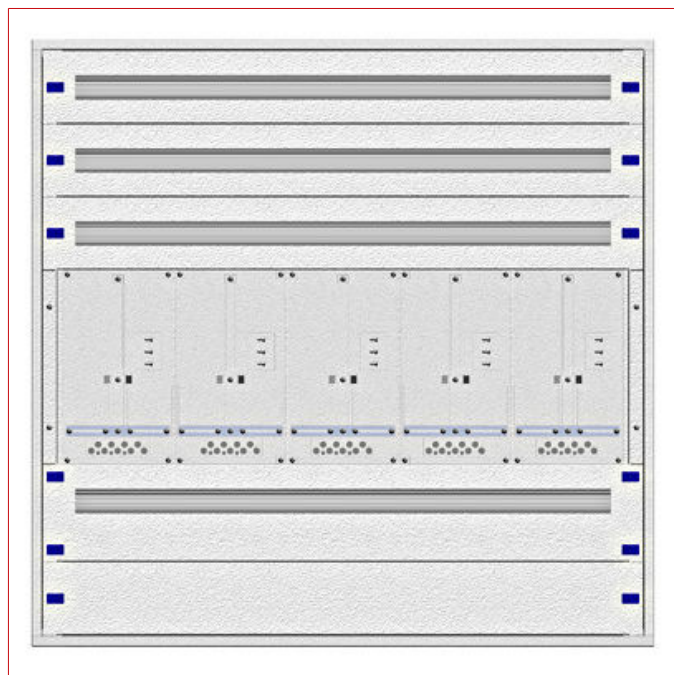

Technické informace

Šířka (netto) (mm)	1.140,00
Výška (netto) (mm)	1.105,00
Hloubka (netto) (mm)	150,00
EAN	9004840961591
Typ	elektroměrový rozvaděč
Oblast	Vídeň
Součástka zařízení	Přední zákryty plech
Barva	RAL 7035
Šířka elektroměru	5
U	24
Řady elektroměrů	1
Místo pro elektroměr	5
Počet elektroměrových míst	3
Přední krycí panely	Ocelový plech
Základní popis	Vestavba

Tabulka objednacích čísel

POPIS	OBSAH MĚDI (kg/km)	OBJ. ČÍSLO
Metering insert 5-24E compl. 5 cou. pl. front pl. st. Wien Frontblende Stahlblech, komplett		IL144524-A
Volitelné příslušenství		
Zemnicí set 300mm/6mm ²		IL900099
Plug-in counter bar 50A for Vienna, Tyrol and Styria Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189
Plug-in counter bar 50A, PU = 64 Pieces Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189-A
Plug-in counter bar pins 63A, 44mm, PU=7 pieces		IL900190
Cover for Plug-in counter bars		IL900191
Meter Connection Terminal 50A for Czech Republic, wired 1,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	975	IL901816
Meter Connection Terminal 50A for Czech Republic, wired 1,8m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1350	IL901820
Meter Connection Terminal 50A for Czech Republic, wired 2,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1725	IL901824