


Technický list produktu (datasheet): IL413545-A

# Zählerverteiler Einsatz 5-45E, 5 Zählerplätze, Tirol

Frontblende Stahlblech, komplett

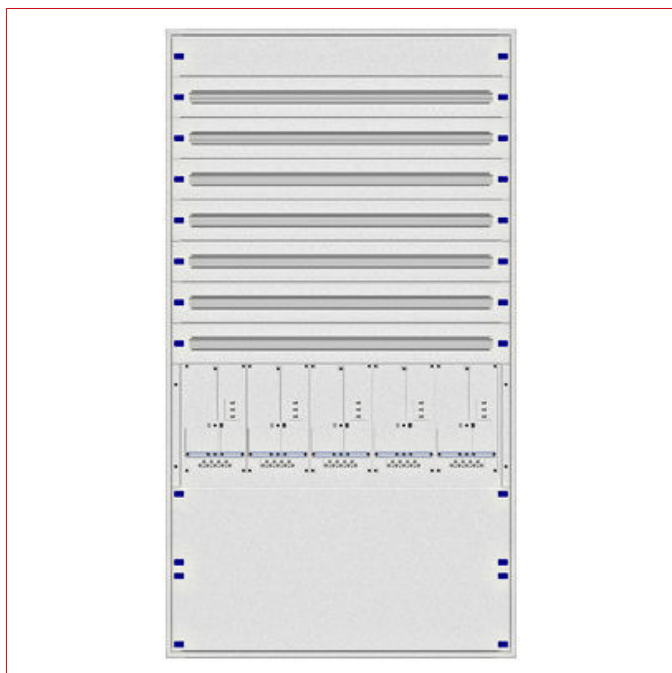

## Technické informace

|                            |                        |
|----------------------------|------------------------|
| Šířka (netto) (mm)         | 1.140,00               |
| Výška (netto) (mm)         | 2.070,00               |
| Hloubka (netto) (mm)       | 150,00                 |
| EAN                        | 9004840966961          |
| Typ                        | elektroměrový rozvaděč |
| Oblast                     | Tirol                  |
| Součástka zařízení         | Přední zákryty plech   |
| Barva                      | RAL 7035               |
| Šířka elektroměru          | 5                      |
| U                          | 45                     |
| Řady elektroměrů           | 1                      |
| Místo pro elektroměr       | 5                      |
| Počet elektroměrových míst | 7                      |
| Základní popis             | Vestavba               |

## Tabulka objednacích čísel

| POPIS                                                                                                                                                                                                                                                                                                                                                          | OBSAH MĚDI (kg/km) | OBJ. ČÍSLO |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------|
| Zählerverteiler Einsatz 5-45E, 5 Zählerplätze, Tirol<br>Frontblende Stahlblech, komplett                                                                                                                                                                                                                                                                       |                    | IL413545-A |
| <b>Volitelné příslušenství</b>                                                                                                                                                                                                                                                                                                                                 |                    |            |
| Zemnicí set 300mm/6mm <sup>2</sup>                                                                                                                                                                                                                                                                                                                             |                    | IL900099   |
| Plug-in counter bar 50A for Vienna, Tyrol and Styria<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019         |                    | IL900189   |
| Plug-in counter bar 50A, PU = 64 Pieces<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019                      |                    | IL900189-A |
| Plug-in counter bar pins 63A, 44mm, PU=7 pieces                                                                                                                                                                                                                                                                                                                |                    | IL900190   |
| Cover for Plug-in counter bars                                                                                                                                                                                                                                                                                                                                 |                    | IL900191   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,3m<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 975                | IL901816   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,8m<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1350               | IL901820   |
| Meter Connection Terminal 50A for Czech Republic, wired 2,3m<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1725               | IL901824   |