

Technický list produktu (datasheet): WSAIE4040P

Instalační konstrukce WSA 3řadá, 51 TE, pro V400 x Š400 mm

vhodná pro WSA4040210



SCHRACK-Info


- For installation of modular devices on DIN-rails
- The distance between the DIN-rails (centre-centre) is:
 - 120mm at WSAIE6040P, WSAIE7050P, WSAIE8060P, WSAIE1080P and WSAIE1280P
 - 130mm at WSAIE5040P, WSAIE1060P and WSAIE1260P
 - 140mm at WSAIE4030P and WSAIE4040P
- The usable depth between the front cover of the WSAIE modular chassis and the WSA enclosure door is 32.5mm
- Material thickness: 1.2mm
- Degree of protection: IP3XD according to IEC 60529
- Color: RAL 7035 (Light grey)
- Supply includes:
 - 1 Piece of front door with 45mm cutouts
 - 2 Pieces of vertical profiles
 - 2 Pieces of closures (top/bottom)
 - DIN-rails
 - Mounting material

Technické informace

Technické informace - Pokračování

Šířka (netto) (mm)	400,00
Výška (netto) (mm)	400,00
Hloubka (netto) (mm)	61,00
Hmotnost (netto) (kg)	3,30
Barva	RAL 7035 (světle šedá)

Rozměrový výkres: Instalační konstrukce WSA 3řadá, 51 TE, pro V400 x Š400 mm

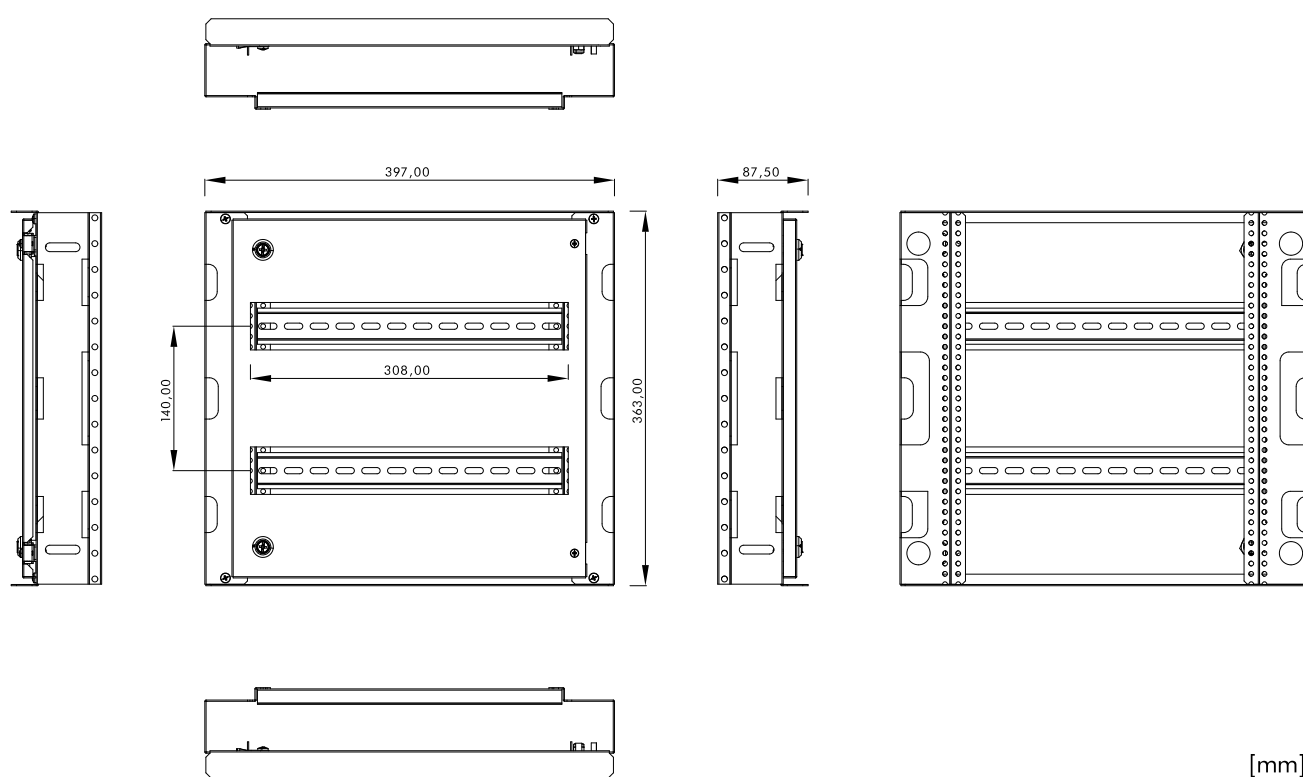

POPIS

OBJ. ČÍSLO

Instalační konstrukce WSA 3řadá, 51 TE, pro V400 x Š400 mm
vhodná pro WSA4040210

WSAIE4040P