

Technický list produktu (datasheet): HLP29MM00F

Optický propojovací kabel duplex LC-LC APC 9/125 OS2 0,5m

LSOH-3, barva žlutá



Schrack-Info

Single mode patch cords are used for telecom networks and also used for high speed metropolitan and access network. The single-mode patch cables are equipped with an LSOH jacket. These comply with IEC or EIA-TIA standards. These singlemode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

FEATURES

- LC/APC - LC/APC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Singlemode cabled fiber conforms to ITU-T G.657.A2, IEC 60793-2-50
- Duplex
- REACH, RoHS and SvHC materials compliant

APPLICATIONS

- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks


- ATM, SONET and WDM



Technické informace

Šířka (netto) (mm)	150,00
Výška (netto) (mm)	200,00
Hmotnost (netto) (kg)	0,04
Norma	IEC 61300-3-4 / IEC 61300-3-6
Norma konektoru	IEC 61754
Konektorová kombinace	LC APC/LC APC
Délka patchkabelu (m)	0,50
Vlákno	9/125 μ OS2 singlemode
Vnější plášť kabelu	LS0H
Barva	Žlutá
Průměr (mm)	2 x 2,2
Vložný útlum (IL) - typický (dB)	$\leq 0,25$
Útlum odrazu (RL) - typický (dB)	≥ 60
Minimální teplota okolí (°C)	-20
Maximální teplota okolí (°C)	60

Rozměrový výkres: Optický propojovací kabel duplex LC-LC APC 9/125 OS2 0,5m

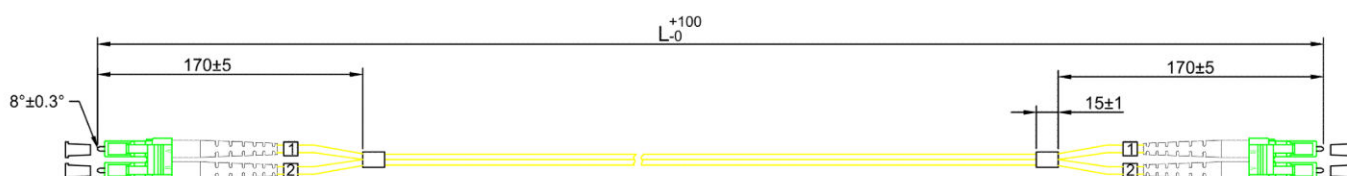

POPIS	OBJ. ČÍSLO
Optický propojovací kabel duplex LC-LC APC 9/125 OS2 0,5m LS0H-3, barva žlutá	HLP29MM00F